



Pierce Enforcer Top Mount Pumper
Township of Branchburg/Country Hills Fire Co.
Job #32177

FEATURES & SPECIFICATIONS


- Pierce Enforcer 60" Chassis with a 10" Raised Roof
- Cummins L9 450hp 2017 EPA compliant Engine
- Allison EVS3000P Automatic Transmission
- Dana Front and Rear Axles
- Waterous CMU 2000 GPM Two Stage Pump
- 750 Gallon Poly Tank
- Akron Eductor 3096-95 Single Agent Foam System
- Harrison MCR 6kw Hydraulic Generator
- Delivered in September 2018



FIRE & SAFETY SERVICES, LTD.

South Plainfield, NJ

web: www.f-ss.com · phone: 800-400-8017

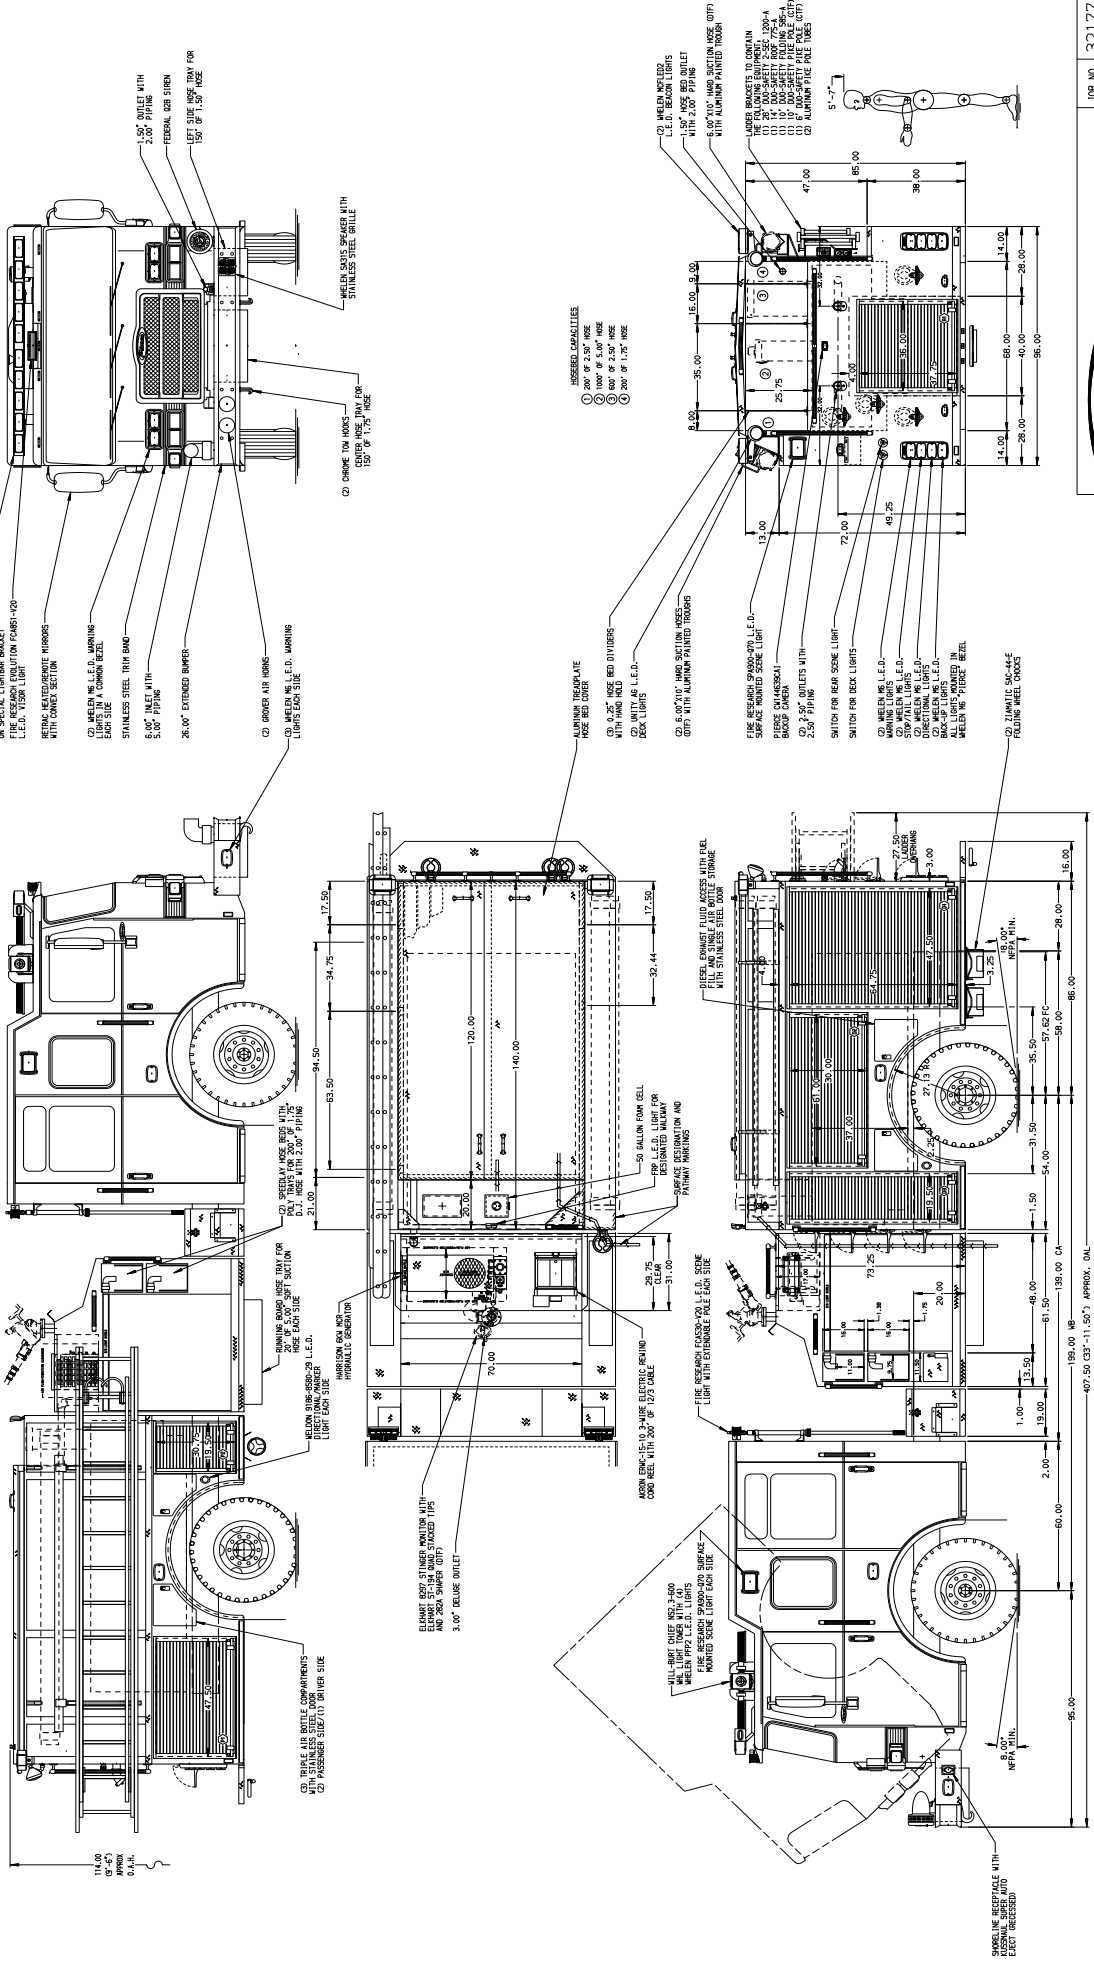

JOB NO. 32177
SCALE 1:24 DATE

Pierce MANUFACTURING INC.

DRAWN BY 21FEB18
CHECKED BY AJA
DATE 21FEB18
SHEET NO. 1 OF 1

CHASSIS DATA
 TITLE 2000-D-750P W/50 GAL. FOAM CELL DELUGE GENERATOR
 MAKE PIERCE
 MODEL DNG
 ENFORCER NO. 32177AD

1. WORK ENDS TO SHOW ARE FROM CENTER LINE.
 2. BATTERY CHARGER AND TIRE INFLATOR TO BE MOUNTED BEHIND DRIVER SEAT.
 3. ALL STRIPS FOR DOORS IN COMPARTMENT-01, 02, 03.
 4. ALL STRIPS FOR DOORS IN COMPARTMENT-01, 02, 03.
 5. ONE ALUMINUM STRIP IN COMPARTMENT-01.
 6. ONE ALUMINUM STRIP IN COMPARTMENT-02.
 7. ONE ALUMINUM STRIP IN COMPARTMENT-03.
 8. ONE 1/4" ALUMINUM STRIP IN COMPARTMENT-01.
 9. RUBBER AND SPACER COMPARTMENT LOCATED AT THE PUMP DELUGE PANEL.
 10. RUBBER AND SPACER COMPARTMENT LOCATED AT THE PUMP DELUGE PANEL.

ALUMINUM BODY MAXIMUM O.A.H. 115.00"

NOTE: DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.