



Pierce Enforcer Heavy Duty Rescue Pumper
Borough of Bellmawr
Job #38421

FEATURES & SPECIFICATIONS


- Pierce Enforcer 70" Chassis with a 10" Raised Roof
- Cummins X12 500hp 2021 EPA compliant Engine
- Allison EVS4000P Automatic Transmission
- Dana Front and Rear Axles
- Waterous CSU 2000GPM Single Stage Pump
- 500 Gallon Poly Water Tank
- Harrison MCR 6KW Hydraulic Generator
- Delivered in June 2024



**FIRE & SAFETY
SERVICES**

South Plainfield, NJ
www.f-ss.com · 800-400-8017



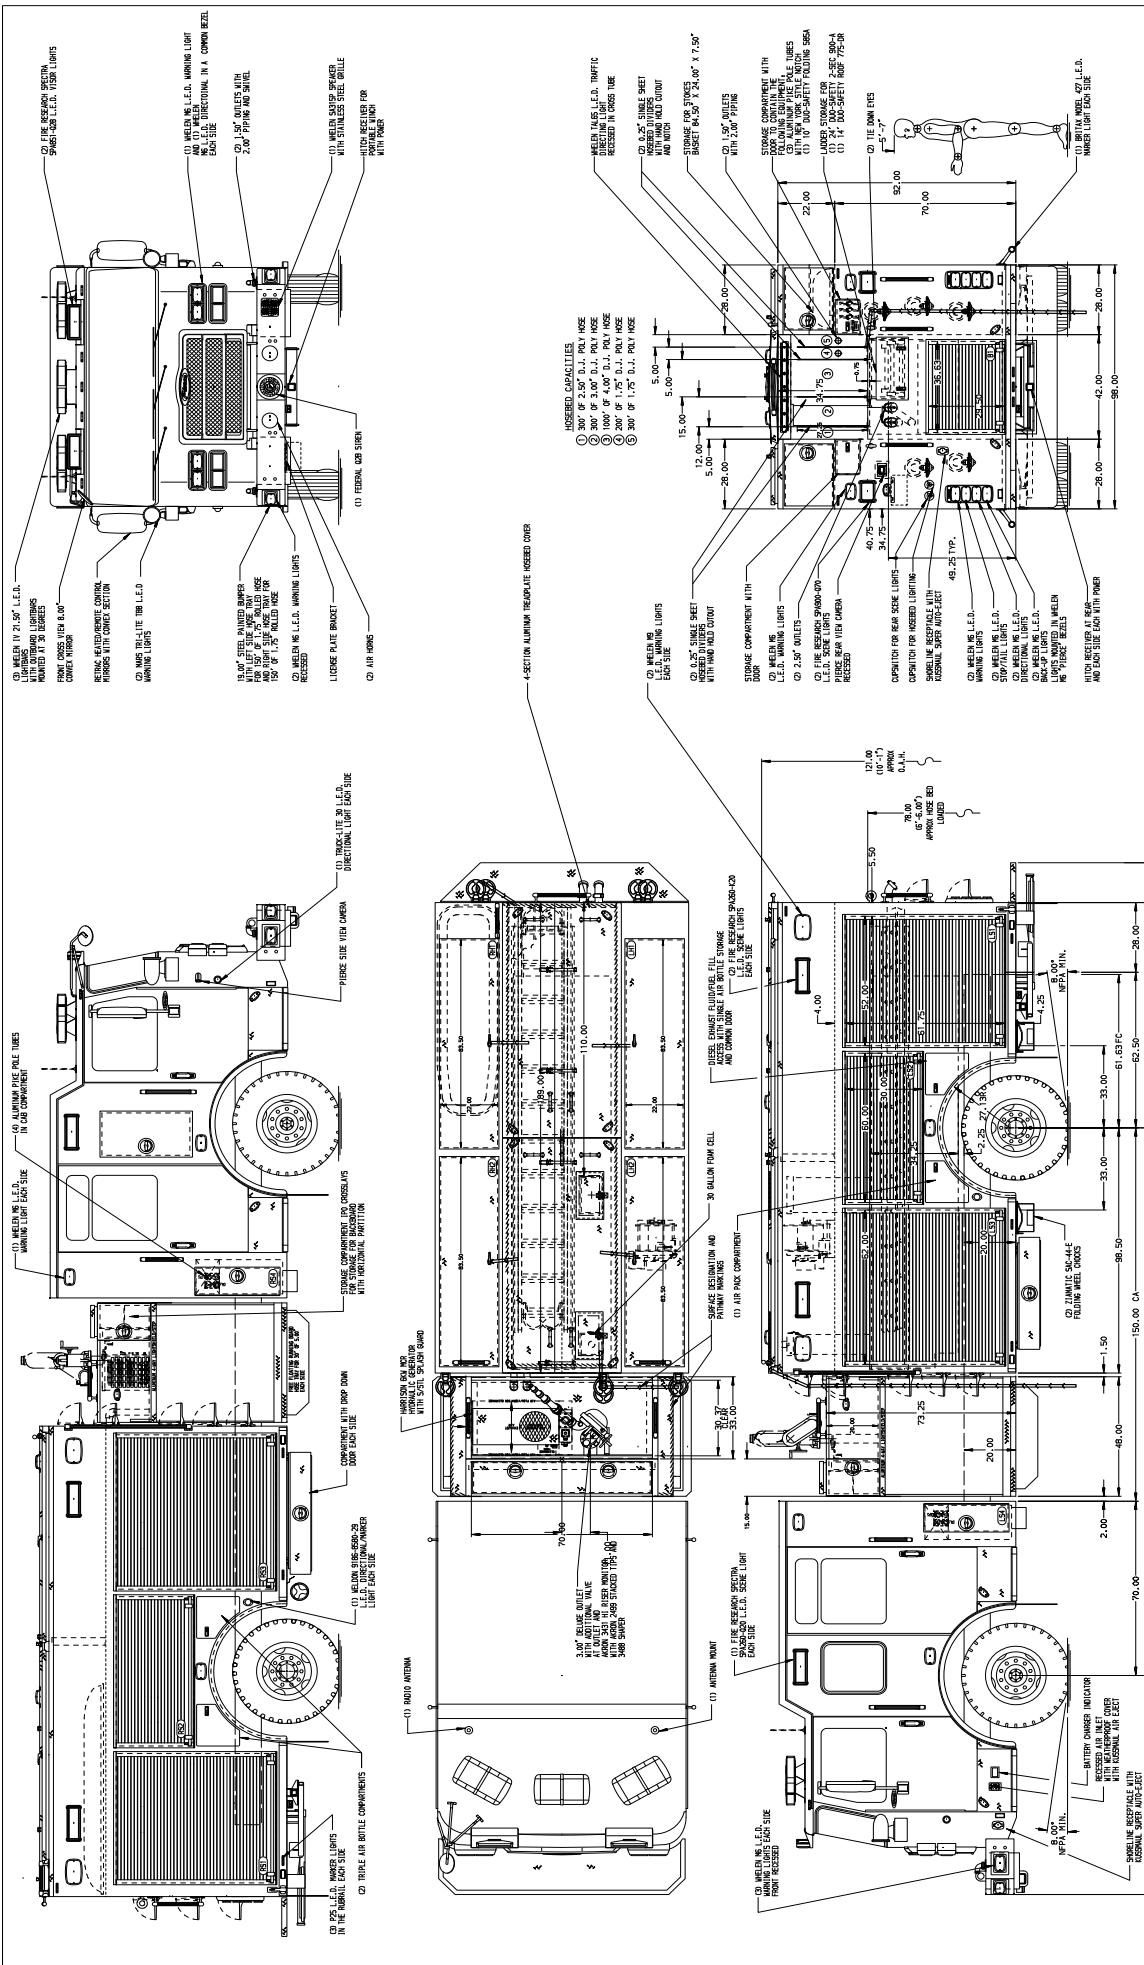

JOB NO. 38421		SCALE 1:24	DATE
MANUFACTURING INC.		DRWN BY 14AUG23	DATE
2000-D-530P-500 GAL. WATER W/30 GAL. FOAM CELL		CHKD BY LST	DATE 14AUG23
TITLE 189' HRP 36 BODY, 48' SIDE CONTROL, DELUGE, GENERATOR		DESIGN BY PHA	DATE 18AUG23
FOR BELLMAIR, NEW JERSEY		PHD	
38421AD-SH1		DWG NO.	SHEET NO. D
ENFORCER NO.		DATE	1 of 2

CHASSIS DATA	COS	LIST	COS	DATA
189' HRP 36 BODY, 48' SIDE CONTROL, DELUGE, GENERATOR				
FOR BELLMAIR, NEW JERSEY				
ENFORCER NO.	DATE	BY	CHKD	DATE

NOTE:
 1. DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.
 2. REFER TO DRAWING 38421AD-SH1 FOR DIMENSIONS OF THE CAB PER SHOP ORDER.
 3. THE TOW BARLEY RECEPTACLE LOCATED IN THE CAB PER SHOP ORDER.